




ALLOY WHEEL **CATALOGUE**

THE COMPLETE SIZE GUIDE

Explore our expansive range of aluminium wheel sizes and specifications to find the perfect fit for your business needs.

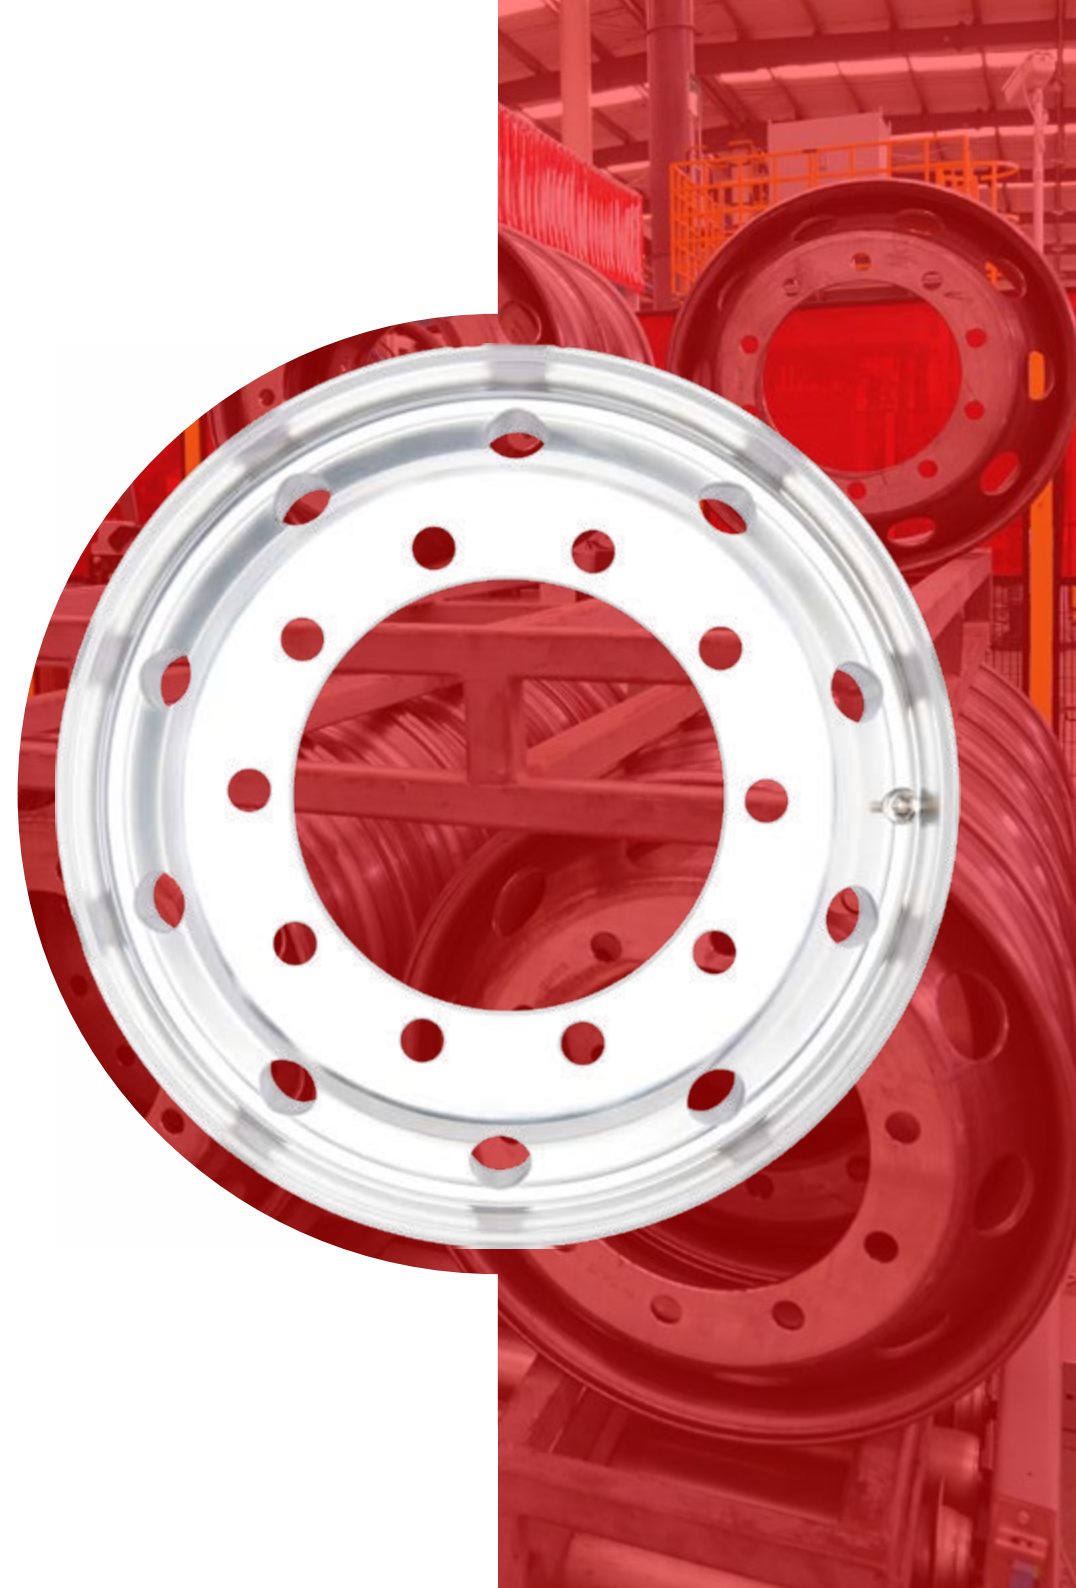

WHO WE ARE

ABOUT US



Our story began in 2012. Since then, our unwavering commitment to quality and innovation has propelled TIA Wheels beyond our origins as wholesalers to trusted commercial industry leaders.

Today, we stand as trusted OEM-approved distributors of our very own TIA Wheels brand. With a diverse range of alloy and steel wheels, we supply everything from individual components to full assemblies for all your commercial and industrial requirements.

But our mission goes beyond providing exceptional products. We're here to offer expertise, personalised support, and a seamless experience, every step of the way.

We're your partner in wheels, from production to distribution.

01 | About TIA Wheels

Who We Are	1
Our Alloy Wheels	2

02 | Wheel Specifications

16" Alloy Wheels	3
17.5" Alloy Wheels	10
19.5" Alloy Wheels	16
22.5" Alloy Wheels	21

03 | About TIA Group

Who We Are	37
Our Divisions	38

MEET TIA'S ALLOYS

ALUMINIUM WHEELS

Discover the perfect blend of style, performance, and durability with TIA's aluminium wheels. Engineered to substantially improve your vehicle's mechanical properties and stability, you'll experience smoother rides, improved tyre and brake life, and better fuel efficiency.

Browse from over 400+ sizes, choose a finish and find out why they are the ultimate choice for OEMs across the UK.



ES3 (ECO-SHIELD)

Our most durable finish; Protects against oxidation + boasts an easy-clean surface.

Yes - That means no polishing!



POLISHED

A mirror-polished look, perfect for those who want to truly stand out in style.



MACHINED

A simple, but stylish matt finish where weight is the primary consideration.



OUR PROMISE

We're dedicated to delivering lasting quality. With our 5-year warranty, we promise that you'll be covered for the long haul.

16.0 x 5.50

ALUMINIUM WHEELS



Reccomended tyre size(s): 195/65R16 | 225/75R16

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT101-1	18	10.9	222.25	6-ø32	164	1x45°	106	124	1285
GT101-1A	16	8.8	222.25	6-ø32	164	1x45°	106.5	122.5	1285
GT101-1Q	15	10	222.25	6-ø24	164	1x45°	103	118	1285
GT101-2	18	10	222.25	6-ø26	161	1x45°	106	124	1285
GT101-2Q	14	8.9	222.25	6-ø24	164	1x45°	104	118	1285
GT101-3	18	11	203.2	5-ø32R22	146	SR22	106	124	1285
GT101-3A	18	10.2	203.2	5-ø32R22	146	SR22	106	124	1285
GT101-5	18	10.8	203.2	5-ø32	146	1x45°	106	124	1285
GT101-6	18	10	203.2	5-ø29R22	146	SR22	106	124	1285
GT101-7	18	10.8	190	6-ø21	140	1x45°	106	124	1285
GT101-8	18	10.2	208	5-ø32R22	150	SR22	106	124	1285
GT101-8A	18	10.2	208	5-ø32R22	150	SR22	106	124	1285
GT101-9	18	10	222.25	6-ø22	161	1x45°	106	124	1285
GT101-10	18	10	222.25	6-ø24	161	1x45°	106	124	1285
GT101-11	12	8.5	222.25	6-ø24	164	1x45°	106	118	1285

16.0 x 5.50

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT101-112	12	9	190	6-ø21	140	1x45°	106	118	1285
GT101-113	10	7.5	222.25	6-ø24	164	1x45°	108	118	1000
GT101-114	10	7.5	222.25	6-ø26	164	1x45°	108	118	1000
GT101-115	9.5	7.5	190	6-ø21	140	1x45°	108.5	118	1000
GT101-116	10	7.5	222.25	6-ø26	161	1x45°	108	118	1000
GT101-117	9.5	7.5	203.2	5-ø21	146	1x45°	108.5	118	1000
GT101-118	9.5	7.5	203.2	5-ø29R22	146	1x45°	108.5	118	1000
GT101-112T	12	8.7	190	6-ø21	140	1x45°	106	118	1285
GT101-113T	10	7.2	222.25	6-ø24	164	1x45°	108	118	1000
GT101-114T	10	7.2	222.25	6-ø26	164	1x45°	108	118	1000
GT101-115T	9.5	7.2	190	6-ø21	140	1x45°	108.5	118	1000
GT101-116T	10	7.2	222.25	6-ø26	161	1x45°	108	118	1000
GT101-117T	9.5	7.3	203.2	5-ø21	146	1x45°	108.5	118	1000
GT101-118T	9.5	7.3	203.2	5-ø29R22	146	1x45°	108.5	118	1000
GT101-13	18	10.5	222.25	6-ø24	164	1x45°	106	124	1285
GT101-14	18	10.8	190	6-ø32	140	SR22	106	124	1285

16.0 x 5.50

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT101-15	18	10.8	190	6-ø26	140	1x45°	106	124	1285
GT101-16	18	10.8	190	6-ø24	140	1x45°	106	124	1285
GT101-16Q	15	9.4	190	6-ø24	140	1x45°	103	118	1285
GT101-17	18	10	203.2	5-ø21	146	1x45°	106	124	1285
GT101-18	18	10.4	205	6-ø21	161	1x45°	106	124	1285
GT101-21	15	9	190	6-ø21	140	1x45°	107	122	1000
GT101-22	15	9	222.25	6-ø24	161	1x45°	107	122	1000
GT101-23	18	10.8	203.2	5-ø32	146	1x45°	106	124	1285
GT101-24	18	10.8	203.2	5-ø32R22	146	SR22	106	124	1285
GT101-27	16	10.7	203.2	5-ø20	145.2	1x45°	106	122	1360
GT101-29	15	9.6	208	5-ø29	150	SR22	103	118	1285
GT111-01	16	9.3	190	6-ø21	140	1x45°	104	120	1285
GT111-3A	15	9.8	203.2	5-ø32R22	146	SR22	106	124	1000
GT111-7	18	10.8	190	6-ø21	140	1x45°	106	124	1285
GT111-12	18	10.5	222.25	6-ø24	164	1x45°	106	124	1285
GT111-13SQ	16	9.3	222.25	6-ø26	164	1x45°	103	119	1285

16.0 x 5.50

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT111-14	18	10.5	222.25	6-ø26	161	1x45°	106	124	1285
GT111-15	15	9.3	222.25	6-ø32	161	1x45°	109	124	1500
GT111-27	16	10.7	203.2	5-ø20	145.2	1x45°	106	122	1360
GT111-115A	9.5	7.5	190	6-ø21	140	1x45°	106	115.5	1000

16.0 x 6.00

ALUMINIUM WHEELS



Reccomended tyre size(s): 195/65R16 | 205/75R16 | 215/75R16 | 225/75R16

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT102-1	18	10.5	190	6-ø24	140	1x45°	111.7	129.7	1360
GT102-2	18	10.1	222.25	6-ø24	164	1x45°	111.7	129.7	1360
GT102-3	18	10.3	205	6-ø25	161	1x45°	111.7	129.7	1500
GT102-4	18	10.2	222.25	6-ø24	161	1x45°	111.7	129.7	1360
GT102-4C	14.3	9.8	222.25	6-ø24	161	1x45°	115.4	129.7	1360
GT102-5	18	10.5	190	6-ø21	140	1x45°	111.7	129.7	1360
GT102-6	18	10.4	222.25	6-ø32R22	164	SR22	111.7	129.7	1360
GT102-7	18	10.5	190	6-ø26	140	1x45°	111.7	129.7	1360
GT102-8	18	10.1	222.25	6-ø32	164	1x45°	111.7	129.7	1360
GT102-9	18	10.2	222.25	6-ø26	161	1x45°	111.7	129.7	1360
GT102-10	18	10.9	203.2	5-ø20	146	1x45°	111.7	129.7	1360
GT102-21	15	9.7	222.25	6-ø26	163	1x45°	112	128	1360
GT102-12	18	10.9	203.2	5-ø21	146	1x45°	111.7	129.7	1360
GT102-13	18	10.9	203.2	5-ø26	146	1x45°	111.7	129.7	1360
GT102-14	18	10.9	203.2	5-ø24	146	1x45°	111.7	129.7	1360

16.0 x 6.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT102-15	18	10.9	203.2	5-ø32R22	146	SR22	111.7	129.7	1360
GT102-17	18	10.9	208	5-ø32R22	150	SR22	111.7	129.7	1360
GT102-18	16	10	222.25	6-ø24	161	1x45°	112	128	1360
GT102-19	18	10.1	222.25	6-ø32R22	164	SR22	112	130	1450
GT102-1A	16	10.2	190	6-ø24	140	1x45°	112.7	128.7	1360
GT102-2A	16	10	222.25	6-ø24	164	1x45°	112.7	128.7	1360
GT102-6A	18	9.8	222.25	6-ø32R22	164	SR22	111.7	129.7	1360
GT102-1Q	16	9.6	190	6-ø24	140	1x45°	112	128	1360
GT102-2Q	16	9.4	222.25	6-ø24	164	1x45°	112	128	1360
GT102-3Q	16	9.4	222.25	6-ø24	164	1x45°	112	128	1360
GT112-2	18	10.1	222.25	6-ø24	164	1x45°	111.7	129.7	1360
GT112-3SQ	16.5	10.3	222.25	6-ø26	164	1x45°	113.5	130	1360
GT112-3HT	16	9.9	222.25	6-ø24	164	1x45°	114	130	1360
GT112-16	18	10.2	222.25	6-ø24	161	1x45°	111.7	129.7	1360
GT112-21	13	10	203.2	6-ø24	146	1x45°	111.8	124.8	1360

16.0 x 6.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT112-22	11	9	203.2	6-ø21	146	1x45°	111.8	122.8	1000
GT112-2ZQ	18	10.1	222.25	6-ø24	164	1x45°	112	130	1360

17.5 x 6.00

ALUMINIUM WHEELS



Reccomended tyre size(s): 8R17.5 | 8.5R17.5 | 9.5R17.5 | 205/65R17.5 | 205/75R17.5 | 215/75R17.5 | 225/75R17.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT062-01	19	12.8	222.25	6-ø32	165	SR22	116.6	135.6	2000
GT062-02	19	12.8	222.25	6-ø32R22	165	SR22	116.6	135.6	2000
GT062-03	19	13.2	190	6-ø24	140	1x45°	116.6	135.6	2000
GT062-13	19	13.2	190	6-ø21	140	1x45°	116.6	135.6	2000
GT062-04	19	12.5	225	10-ø26	176	1x45°	116.6	135.6	2000
GT062-04B	19	12.5	225	10-ø32	176	1x45°	116.6	135.6	2000
GT062-05	19	13.4	222.25	6-ø32R22	164	SR22	116.6	135.6	2000
GT062-05A	19	13	222.25	6-ø32R22	164	SR22	116.6	135.6	1800
GT062-05B	19	13	222.25	6-ø32R22	164	SR22	116.6	135.6	1800
GT062-05C	19	13	222.25	6-ø32R22	164	SR22	116.6	135.6	1800
GT062-06	19	13	222.25	6-ø32	164	1x45°	116.6	135.6	2000
GT062-18	19	13	222.25	6-ø24	164	1x45°	116.6	135.6	2000
GT062-07	19	13.3	208	5-ø32	150	1x45°	116.6	135.6	2000
GT062-08	19	13.3	208	5-ø32R22	150	SR22	116.6	135.6	2000
GT062-08B	19	12.9	208	5-ø32R22	150	SR22	112	131	2000

17.5 x 6.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT062-09	19	12.8	222.25	6-ø24	162	1x45°	116.6	135.6	2000
GT062-15	19.5	13	222.25	6-ø32R22	164	SR22	116.1	135.6	2000
GT062-15B	19.5	12.4	222.25	6-ø32R22	164	SR22	116.1	135.6	1600
GT062-17	20	12.5	225	10-ø26	176	1x45°	115.6	135.6	2500
GT062-10	20	12.4	245	6-ø26	202	1x45°	115.6	135.6	2500
GT063-01	19	13.2	205	6-ø21	161	1x45°	114	133	2000
GT063-02	19	13.2	222.25	6-ø21	161.1	1x45°	114	133	2000
GT063-03	19	13.2	205	6-ø26	161	1x45°	114	133	2000
GT063-04	19	13.2	222.25	6-ø24	161	1x45°	114	133	2000
GT063-18	19	13.2	222.25	6-ø32	161	1x45°	114	133	2000
GT063-05	19	13.1	205	6-ø30	161	1x45°	114	133	2000
GT063-06	19	13.1	205	6-ø32	161	1x45°	114	133	2000
GT063-09	19	13.5	225	6-ø24	176	1x45°	114	133	2000
GT063-10	19	13.6	203.2	5-ø32R22	146	SR22	114	133	2000
GT063-13	17	13.1	203.2	5-ø32R22	146	SR22	114	131	1600
GT063-13A	17	12.7	203.2	5-ø32R22	146	SR22	114	131	1750

17.5 x 6.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT063-16	19	13.2	205	6-ø21	161	1x45°	114	133	2000
GT063-17	17	12.7	203.2	5-ø29R22	146	SR22	114	131	1600
GT063-17A	17	12.7	203.2	5-ø29R22	146	SR22	114	131	1600
GT063-17B	19	12.8	203.2	5-ø29R22	146	SR22	114	133	1600
GT063-17D	19	11.4	203.2	5-ø29R22	146	SR22	114	133	1600
GT063-20	20	13.5	205	6-ø21	161	1x45°	114	134	1750
GT063-21	20	13.9	205	6-ø21	161	1x45°	114	134	1750
GT063-23	20	13.6	205	6-ø21	161	1x45°	114	134	1750
GT063-24	20	13.6	205	6-ø21	161	1x45°	114	134	1750
GT063-25	20	13.3	205	6-ø21	161	1x45°	114	134	1750
GT063-27	20	13.1	205	6-ø21	161	1x45°	114	134	1750
GT064-02	19	13.1	222.25	6-ø32R22	164	SR22	116	135	2000
GT064-02A	19	12.8	222.25	6-ø32R22	164	SR22	116	135	2000
GT065-01	19	12.8	275	6-ø21	221	1x45°	114	133	2000
GT066-02	19.5	14.6	222.25	6-ø32	164	1x45°	114	133.5	2200
GT066-03	19.5	14.6	222.25	6-ø24	164	1x45°	114	133.5	2200

17.5 x 6.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT066-04	19.5	15.2	222.25	6-ø32	161	1x45°	114	133.5	2200
GT066-07	19	13	225	10-ø26	176	1x45°	116.6	135.6	2200
GT067-01	20	12.9	245	6-ø26	202	1x45°	113	133	2000
GT067-02	19	12.7	245	6-ø24	191	1x45°	114	133	2000

17.5 x 6.75

ALUMINIUM WHEELS



Reccomended tyre size(s): 8R17.5 | 8.5R17.5 | 9.5R17.5 | 10R17.5 | 205/65R17.5 | 205/75R17.5 | 215/75R17.5 | 225/75R17.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT060-01	20	13.9	245	6-ø24	202	1x45°	120	140	2500
GT060-02	20	13.9	245	6-ø26	202	1x45°	120	140	2500
GT060-07	20	13	275	8-ø24	221	1x45°	120	140	2500
GT060-08	20	13	275	8-ø26	221	1x45°	120	140	2500
GT060-08A	20	13	275	8-ø26	221	1x45°	120	140	2500
GT060-08B	20	13	275	8-ø26R18	221	SR18	120	140	2500
GT060-08-KIC	21	13	275	8-ø26	221.1	1x45°	120	141	2550
GT060-10	20	13	275	8-ø30	221	1x45°	120	140	2500
GT060-11	20	13	275	8-ø32	221	1x45°	120	140	2500
GT060-12	18	12.7	275	8-ø24	221.1	1x45°	123	141	2500
GT060-14	20	12.6	245	6-ø21	202	1x45°	120	140	2500
GT061-01	21	13.8	225	10-ø26	176	1x45°	120	141	3000
GT061-01A	21	13.8	225	10-ø26	176.2	1x45°	120	141	3000
GT061-01B	21	13.8	225	10-ø32	176	1x45°	120	141	3000
GT061-03	20	14.3	222.25	6-ø32R22	164	SR22	120	140	2500

17.5 x 6.75

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT061-03A	20	14.3	222.25	6-ø32R22	164	SR22	120	140	2500
GT061-04	20	14.1	222.25	6-ø32R22	165	SR22	120	140	2500
GT061-05	20	14.3	222.25	6-ø24	164	1x45°	120	140	2500
GT061-06	20	14.3	222.25	6-ø22	164	1x45°	120	140	2500
GT061-07	20	14.5	222.25	6-ø32	161	1x45°	120	140	2500
GT061-09	20	14.3	222.25	10-ø32R22	165	SR22	120	140	2500
GT061-10	20	14.5	222.25	6-ø24	161	1x45°	120	140	2500
GT061-11	20	13.9	222.25	6-ø32R22	164	SR22	120	140	2500
GT061-15	20	12.9	222.25	6-ø24	164	1x45°	120	140	2500
GT061-16	20	12.8	222.25	6-ø32R22	164	SR22	120	140	2500
GT061-17	20	13.9	203.2	5-ø29R22	146	SR22	120	140	2500
GT061-19	21	13.5	222.25	10-ø32R22	165	SR22	120	141	3000

19.5 x 6.75

ALUMINIUM WHEELS



Reccomended tyre size(s): 245/70R19.5 | 265/70R19.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT091-01	20	16.7	275	8-ø22	221	1x45°	120	140	2750
GT091-02	20	17.1	222.25	8-ø22	164	1x45°	120	140	2750
GT091-12	20	17.1	222.25	8-ø26	164	1x45°	120	140	2750
GT091-03	20	16.7	285	8-ø32R22	221	SR22	120	140	2750
GT091-04	20	16.6	275	8-ø32	221	1x45°	120	140	2750
GT091-05	20	16.6	275	8-ø32R22	221	SR22	120	140	2750
GT091-06	20	16.7	275	8-ø24	221	1x45°	120	140	2750
GT091-07	20	17.3	222.25	8-ø32R22	164	SR22	120	140	2750
GT091-08	20	17.4	222.25	6-ø32R22	164	SR22	120	140	2750
GT091-08A	20	17	222.25	6-ø32R22	164	SR22	120	140	2750
GT091-08C	20	16	222.25	6-ø32R22	164	SR22	120	140	2500
GT091-09	20	17.5	222.25	6-ø26	161	1x45°	120	140	2750
GT091-13	20	17	225	10-ø26	176	1x45°	120	140	2750
GT091-14	20	16.5	275	8-ø26	221	1x45°	120	140	2750
GT093-01	20	17	285	8-ø32R22	221	SR22	120	140	2750

19.5 x 6.75

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT093-02	20	17	275	8-ø26	221	1x45°	120	140	2750
GT093-05	20	17	275	8-ø32	221	1x45°	120	140	2750
GT093-03	20	17	275	8-ø26	221	1x45°	127	147	2750
GT093-04	20	17	285	8-ø32R22	221	SR22	127	147	2750
GT093-07	20	17	222.25	6-ø26	161	1x45°	127	147	2750
GT093-08	20	16.7	222.25	6-ø32R22	164	SR22	127	147	2750
GT093-09	20	17.3	275	8-ø30	221	1x45°	120	140	2750
GT093-10	20	17.4	275	8-ø24	221	1x45°	120	140	2750
GT093-12	20	17.3	275	8-ø26	221	1x45°	118	138	2750
GT093-13	20	17.6	275	8-ø30	221	1x45°	126	146	2750
GT093-14	20	17.6	275	8-ø30	221	1x45°	127	147	2750

19.5 x 7.50

ALUMINIUM WHEELS



Reccomended tyre size(s): 245/70R19.5 | 255/60R19.5 | 265/70R19.5 | 285/70R19.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT090-01	20	18	275	8-ø24	221	1x45°	135	155	3000
GT090-02	20	18	275	8-ø26	221	1x45°	135	155	3000
GT090-04	20	18	275	8-ø30	221	1x45°	135	155	3000
GT090-05	20	18	275	8-ø32	221	1x45°	135	155	3000
GT090-05B	20	18	275	8-ø32	221	1x45°	135	155	3000
GT090-07	20	18.5	225	10-ø26	176	1x45°	135	155	3000
GT090-09	20	18	285.75	10-ø26	220.1	1x45°	135	155	3000
GT090-11	20	18	275	8-ø32R22	221	SR22	135	155	3000
GT090-12	20	19.2	222.25	6-ø24	164	1x45°	135	155	2500
GT090-13	20	19.2	222.25	6-ø32R22	164	SR22	135	155	2500
GT090-14	20	18	285	8-ø32R22	221	SR22	135	155	3040
GT090-15	20	19.2	222.25	6-ø32	164	1x45°	135	155	2500
GT092-01	20	18.8	275	8-ø24	221	1x45°	135	155	3000
GT092-02	20	18.8	275	8-ø26	221	1x45°	135	155	3000
GT094-01	22	18.8	275	8-ø24	221	1x45°	125.5	147.5	3000

19.5 x 7.50

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT094-02	22	18.8	275	8-ø32	221	1x45°	125.5	147.5	3000
GT094-03	22	18.8	275	8-ø26	221	1x45°	125.5	147.5	3000

19.5 x 14.0

ALUMINIUM WHEELS



Reccomended tyre size(s): 425/55R19.5 | 435/50R19.5 | 445/45R19.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT049-01	28	25.9	275	8-ø26	221	1x45°	0	28	5000
GT049-02	28	26.6	225	10-ø26	176	1x45°	0	28	5000

22.5 x 7.50

ALUMINIUM WHEELS



Reccomended tyre size(s): 10R22.5 | 11R22.5 | 255/70R22.5 | 275/70R22.5 | 275/80R22.5 | 275/90R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT011-01	24	23.9	335	10-ø24	281.2	1x45°	135	159	3550
GT011-02	24	23.9	335	10-ø26	281.2	1x45°	135	159	3550
GT011-04	24	23.9	335	10-ø32	281.2	1x45°	135	159	3550
GT011-06	24	25	285.75	10-ø24	220	1x45°	135	159	3550
GT011-07	24	25.4	285.75	10-ø26	220	1x45°	135	159	3550
GT011-08	24	25.4	285.75	10-ø26	221	1x45°	135	159	3550
GT011-09	24	25.3	285.75	10-ø32	220	1x45°	135	159	3550
GT011-11	24	25.3	285	8-ø24	221	1x45°	135	159	3450
GT011-12	24	25.9	285	8-ø26	221	1x45°	135	159	3450
GT011-14	24	25.9	285	8-ø32	221	1x45°	135	159	3450
GT011-16	24	25.9	275	8-ø24	221	1x45°	135	159	3450
GT011-16B	23	25.9	275	8-ø24	221	1x45°	135	158	3450
GT011-17	24	25.9	275	8-ø26	221	1x45°	135	159	3450
GT011-19	24	25.9	275	8-ø32	221	1x45°	135	159	3450
GT011-21	24	24.1	335	10-ø26	281.2	1x45°	135	159	3550

22.5 x 7.50

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT011-22	24	25.9	285	8-ø32R22	221	SR22	135	159	3450
GT011-23	24	25.9	275	8-ø32R22	221	SR22	135	159	3450
GT011-28	24	26.5	275	8-ø32R22	214	SR22	135	159	3450
GT011-29	21.5	23.9	285	8-ø32R22	221	SR22	137.5	159	3450
GT011-30	23	24.3	285.75	10-ø26	220	1x45°	135	158	3550
GT010-04	22.5	22.2	335	10-ø26	281.2	1x45°	135	157.5	3450
GT010-05	22.5	22.2	335	10-ø32	281.2	1x45°	135	157.5	3450

22.5 x 8.25

ALUMINIUM WHEELS



Reccomended tyre size(s): 11R22.5 | 12R22.5 | 255/70R22.5 | 275/70R22.5 | 275/80R22.5 | 275/90R22.5 | 295/80R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT013-01	23	25.2	ø335	10-ø26	ø281.2	1x45°	145	168	3650
GT013-03	23	25.1	ø335	10-ø32	ø281.2	1x45°	145	168	3650
GT013-03SQ	23	25.1	ø335	10-ø32	ø281.2	1x45°	145	168	3650
GT013-06	23	26.3	ø285	8-ø32	ø221.1	1x45°	145	168	3650
GT013-10	23	26	ø285.75	10-ø26	ø221	1x45°	145	168	3650
GT013-11	23	24.5	ø335	10-ø26	ø281.2	1x45°	145	168	3650
GT013-11D	23	24.8	ø335	10-ø26	ø281.2	1x45°	145	168	3650
GT013-12	23	24.3	ø335	10-ø26	ø281.2	1x45°	145	168	3650
GT013-36	24	26.5	ø335	10-ø26	ø281.2	1x45°	144.5	168.5	3835
GT013-37	24	26.4	ø335	10-ø32	ø281.2	1x45°	144.5	168.5	3835
GT013-56	21.7	24.4	ø335	10-ø26	ø281.2	1x45°	145	166.7	3650
GT013-57	21.7	23.4	ø335	10-ø26	ø281.2	1x45°	145	166.7	3650
GT013-58	21	22.5	ø335	10-ø26	ø281.2	1x45°	145	166	3650
GT013-58B	21	22.5	ø335	10-ø32	ø281.2	1x45°	145	166	3650
GT013-59	20.7	21.5	ø335	10-ø26	ø281.2	1x45°	145.3	166	3650

22.5 x 8.25

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT013-60	22.7	23.9	335	10-ø32	281.2	1x45°	144	166.7	3650
GT013-61	20.3	21	335	10-ø26	281.2	1x45°	145.7	166	3550
GT030-01	23.5	23.8	335	10-ø26	281.2	1x45°	144	167.5	3650
GT030-02	23.5	23	335	10-ø26	281.2	1x45°	144	167.5	3350
GT030-03	23.5	23.8	335	10-ø32	281.2	1x45°	144	167.5	3650
GT030-11	23	24.8	335	10-ø26	281.2	1x45°	145	168	3650
GT030-12	23	24.5	335	10-ø26	281.2	1x45°	145	168	3650
GT030-25	23	22.4	285.75	10-ø26	220	1x45°	145	168	3650
GT030-26	23	23	285.75	10-ø26	220	1x45°	145	168	3650
GT030-27T	24	25.5	335	10-ø26	281.2	1x45°	145	169	3835
GT030-31T	24	25.5	335	10-ø32	281.2	1x45°	145	169	3835
GT030-33	23	22	335	10-ø32	281.2	1x45°	145	168	3350
GT030-34	23.5	21.5	335	10-ø26	281.2	1x45°	144.5	168	3350
GT030-35	23	22.5	335	10-ø26	281.2	1x45°	145	168	3650
GT030-35A	23	22.9	335	10-ø26	281.2	1x45°	145	168	3650
GT030-35B	23	22.9	335	10-ø32	281.2	1x45°	145	168	3650

22.5 x 8.25

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT030-36	23	22.8	335	10-ø26	281.2	1x45°	145	168	3650
GT030-36B	21.7	22.3	335	10-ø26	281.2	1x45°	146.3	168	3650
GT030-37	23	23.1	335	10-ø26	281.2	1x45°	145	168	3650
GT030-38	23	23.8	285.75	10-ø26	221	1x45°	145	168	3650
GT030-39	23	22.8	335	10-ø32	281.2	1x45°	145	168	3650
GT030-40	22.7	22.5	335	10-ø26	281.2	1x45°	145.3	168	3650
GT030-41	24	23.5	335	10-ø26	281.2	1x45°	144.5	168.5	3650
GT030-46	23.5	21.5	335	10-ø32R22	281.2	SR22	144.5	168	3350
GT030-47	23	25.3	335	10-ø26	281.2	1x45°	145	168	3650
GT033-01	22.5	23	285.75	10-ø26	220	1x45°	145	167.5	3650
GT034-01	22.5	22.6	285.75	10-ø26	220	1x45°	145	167.5	3650
GT034-02	23	22.9	285.75	10-ø26	220	1x45°	145	168	3650
GT034-02A	23	24	285.75	10-ø26	220	1x45°	145	168	3650
GT034-02D	23	24.4	285.75	10-ø26	220	1x45°	145	168	3650
GT034-03	22.5	22.6	275	10-ø26	220	1x45°	145	167.5	3650
GT034-04	23	24.2	285	8-ø26	221	1x45°	145	168	3650

22.5 x 8.25

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT034-05	23	24.2	285	8-ø32	221	1x45°	145	168	3650
GT034-06	23	24.2	275	8-ø32	221	1x45°	145	168	3650
GT034-07	23	23.1	285	8-ø32R22	221	SR22	145	168	3650
GT034-08	23	23.3	285.75	10-ø32R22	221	SR22	145	168	3650
GT034-09	24	23.9	275	8-ø26	221	1x45°	144.5	168.5	3650
GT034-18	24	25	285.75	8-ø32	221	1x45°	145	169	3650
GT034-10	23	23.9	285.75	10-ø32	220	1x45°	145	168	3650
GT034-11	22	21.4	285.75	10-ø26	220	1x45°	145	167	3350
GT034-12	23	24	285.75	10-ø32R22	222	SR22	145	168	3650
GT034-13	23	23.9	275	8-ø24	221	1x45°	145	168	3650
GT034-14	24	23.9	275	8-ø26	220	1x45°	145	168	3650
GT034-17	21.5	21.5	285.75	10-ø26	220	1x45°	145.5	167	3350
GT034-21	20.5	20.5	285.75	10-ø26	220	1x45°	146.25	166.75	3350
GT034-22	20	19.5	285.75	10-ø26	220	1x45°	146.75	166.75	3350
GT034-22M	20	19.5	285.75	10-ø26	220.1	1x45°	146.75	166.75	3350
GT034-23	18.7	18.5	285.75	10-ø26	220	1x45°	148	166.7	3350

22.5 x 8.25
ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT034-24	20.5	20.6	285.75	10-ø26	220	1x45°	146	166	3350
GT034-25	23	24	285.75	10-ø32	222	1x45°	145	168	3650
GT034-26	19	18	285.75	10-ø26	220	1x45°	147.25	166.25	3350
GT034-31	22.5	23	285.75	10-ø26	220	1x45°	145	167.5	3650
GT034-32	22.5	23	285.75	10-ø26	220	1x45°	145	167.5	3650
GT034-32F	24	24.2	285.75	10-ø26	220	1x45°	144	168	3650
GT034-33	22.5	23.8	285.75	10-ø26	220	1x45°	145	167.5	3650
GT034-34	23	24.6	285.75	10-ø26	220	1x45°	145	168	3650
GT034-35	23	24.5	285.75	10-ø26	220	1x45°	145	168	3650
GT034-36	23	24.3	285.75	10-ø26	220	1x45°	145	168	3650
GT034-44	22	22.5	285.75	10-ø26	220	1x45°	146	168	3650
GT034-45	22	22.5	285.75	10-ø26	220	1x45°	146	168	3650
GT034-51	22	21.8	285.75	10-ø26	220	1x45°	145	167	3350
GT034-52	22	21.8	285.75	10-ø26	220	1x45°	145	167	3350
GT034-57	23	24.5	285	8-ø32R22	221	SR22	145	168	3650
GT034-58	22.5	22.6	285.75	10-ø30	220	1x45°	145	167.5	3650

22.5 x 8.25
ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT034-59	22.5	22.5	285.75	10-ø32R22	222	SR22	145	167.5	3650
GT035-01	24	24	335	10-ø26	281.2	1x45°	104	128	3650
GT035-02	24	24	335	10-ø32	281.2	1x45°	104	128	3650

22.5 x 9.00

ALUMINIUM WHEELS



Reccomended tyre size(s): 12R22.5 | 13R22.5 | 295/55R22.5 | 295/60R22.5 | 295/80R22.5 | 305/70R22.5 | 315/60R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT012-01	24	27.6	285.75	10-ø26	221	1x45°	152	176	4125
GT012-04	24	27.5	285.75	10-ø32	221	1x45°	152	176	4125
GT012-05	24	27.5	285	8-ø32R22	221	SR22	152	176	4125
GT012-06	24	26.1	335	10-ø26	281.2	1x45°	152	176	4125
GT012-08	24	26	335	10-ø32	281.2	1x45°	152	176	4125
GT012-09	24	27	335	10-ø26	281.2	1x45°	152	176	4700
GT012-10	24	27.7	285.75	10-ø26	220	1x45°	152	176	4125
GT012-12	24	27.6	285.75	10-ø32	220	1x45°	152	176	4125
GT012-16	24	27.4	285.75	10-ø32R22	222	SR22	152	176	4125
GT012-21	25	26.5	335	10-ø32	281.2	1x45°	151	176	4125
GT012-22	25	28.3	285.75	10-ø26	221	1x45°	151	176	4125
GT012-31	24	25.3	335	10-ø26	281.2	1x45°	152	176	4000
GT012-45	24	25.3	335	10-ø26	281.2	1x45°	152	176	4000
GT012-56	21.7	25	335	10-ø26	281.2	1x45°	152	173.7	4125
GT012-57	21.7	24	335	10-ø26	281.2	1x45°	152	173.7	3750

22.5 x 9.00

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT012-58	21	23	335	10-ø26	281.2	1x45°	152.7	173.7	3650
GT012-61	22.7	24.7	335	10-ø32	281.2	1x45°	151	173.7	4125
GT012-62	22.7	25	335	10-ø26	281.2	1x45°	152	174.7	4125
GT012-101	29.2	31.6	335	10-ø32	281.2	1x45°	158.2	187.4	5500
GT019-01	23.5	24.5	335	10-ø26	281.2	1x45°	152	175.5	4700
GT019-02	23.5	24.5	335	10-ø32	281.2	1x45°	152	175.5	4700
GT019-03	23.5	24.8	335	10-ø26	281.2	1x45°	152	175.5	4700
GT019-04	23.5	24.8	335	10-ø32	281.2	1x45°	152	175.5	4700
GT019-11	22.7	22.5	335	10-ø26	281.2	1x45°	152.3	175	4125
GT019-12	23	23.5	335	10-ø26	281.2	1x45°	152	175	4125
GT019-13	20.7	21.5	335	10-ø26	281.2	1x45°	154.3	175	3550
GT019-14	22.7	22.5	335	10-ø26R18	281.2	SR18	152.3	175	4125
GT019-15	20.3	20.3	335	10-ø26	281.2	1x45°	154.7	175	3550
GT018-03	23.5	25	335	10-ø26	281.2	1x45°	152	175.5	4700
GT032-08T	25	27	335	10-ø32	281.2	1x45°	151.75	176.75	4700
GT032-09T	25	27	335	10-ø26	281.2	1x45°	151.75	176.75	4700

22.5 x 9.00
ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT036-03	23.5	25.5	285.75	10-ø26	220	1x45°	152	175.5	4550
GT036-04	24	27	285.75	10-ø26	220	1x45°	152	176	4125
GT036-05	24	27.2	285.75	10-ø26	220	1x45°	152	176	4125
GT036-06	22.7	24.2	285.75	10-ø26	220	1x45°	152.3	175	4000
GT072-02	24	24.2	285.75	10-ø26	220	1x45°	79	103	4125
GT072-03	24	22.8	335	10-ø32	281.2	1x45°	79	103	4700
GT072-04	24	22.8	335	10-ø32R22	281.2	SR22	79	103	4700
GT072-05	24	22.8	335	10-ø26	281.2	1x45°	79	103	4700
GT072-06	24	24.2	285.75	10-ø32R22	221.5	SR22	79	103	4700
GT072-07	24	24.4	285	8-ø32R22	221	SR22	79	103	4125
GT072-12	24	24.6	285.75	8-ø32	220	1x45°	79	103	4125
GT072-13	24	22.8	335	10-ø26	281.2	1x45°	79	103	4125

22.5 x 11.75
ALUMINIUM WHEELS



Reccomded tyre size(s): 355/50R22.5 | 365/70R22.5 | 375/45R22.5 | 375/50R22.5 | 375/90R22.5 | 385/55R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT080-01T	23	23.4	335	10-ø26	281.2	1x45°	0	23	4500
GT080-03	23	25	285.75	10-ø26	220	1x45°	0	23	4500
GT080-08	23	23.2	335	10-ø32	281.2	1x45°	0	23	4500
GT080-10	24	24.9	335	10-ø26	281.2	1x45°	0	24	4500
GT080-10A	24	24.9	335	10-ø26	281.2	1x45°	0	24	5000
GT080-20A	24	24.9	335	10-ø32	281.2	1x45°	0	24	5000
GT080-12	24	26.5	285.75	8-ø26	220	1x45°	0	24	5000
GT080-11T	25	25.5	335	10-ø26	281.2	1x45°	0	25	5000
GT080-15	24	25.5	335	10-ø26	281.2	1x45°	0	24	4500
GT080-15A	24	25.5	335	10-ø26	281.2	1x45°	0	24	4500
GT081-01	21.7	22.3	335	10-ø26	281.2	1x45°	0	21.7	4500
GT070-01	25.6	25.8	335	10-ø26	281.2	1x45°	120	145.6	4750
GT070-03	25.6	26.1	285.75	10-ø26	220	1x45°	120	145.6	4750
GT070-03A	25.6	26.1	285.75	10-ø26	220	1x45°	120	145.6	4750
GT070-03B	25.6	26.1	285.75	10-ø26	220	1x45°	120	145.6	4750

22.5 x 11.75

ALUMINIUM WHEELS



Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT070-04	25.6	26.1	285.75	10-ø32	220	1x45°	120	145.6	4750
GT070-05	25.6	26.4	275	8-ø26	220	1x45°	120	145.6	4750
GT070-06	25.6	25.6	335	10-ø32	281.2	1x45°	120	145.6	4750
GT070-08	25.6	26.1	285.75	10-ø32R22	221.5	SR22	120	145.6	4750
GT070-11	25.6	27	335	10-ø26	281.2	1x45°	120	145.6	5000
GT070-12	25.6	27	335	10-ø32	281.2	1x45°	120	145.6	5000
GT070-18	28.15	27.8	335	10-ø26	281.2	1x45°	118.85	147	5000
GT070-19	28.15	27.8	335	10-ø32	281.2	1x45°	118.85	147	5000
GT070-20	25.6	25.1	335	10-ø26	281.2	1x45°	120	145.6	4750
GT070-21	26.3	26.7	335	10-ø26	281.2	1x45°	120	146.3	5000
GT070-24	25.6	26.9	335	10-ø32	281.2	1x45°	120	145.6	5000
GT071-01	24.6	24	335	10-ø26	281.2	1x45°	120	144.6	4500
GT170-01	26.3	27.3	335	10-ø26	281.2	1x45°	135	161.3	5000

22.5 x 13.0

ALUMINIUM WHEELS



Reccomended tyre size(s): 425/65R22.5 | 445/65R22.5 | 445/75R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT020-01	28	32.1	285.75	10-ø26	221	1x45°	-14	14	5700
GT020-03T	28	30.2	335	10-ø26	281.2	1x45°	-14	14	5700
GT020-03B	26	26.5	335	10-ø26	281.2	1x45°	-13	13	5700
GT020-05	28	32.2	285.75	10-ø26	220	1x45°	-14	14	5700
GT020-05B	26	28.5	285.75	10-ø26	220	1x45°	-13	13	5700

22.5 x 14.0

ALUMINIUM WHEELS



Recommended tyre size(s): 425/65R22.5 | 435/50R22.5 | 445/50R22.5 | 445/65R22.5 | 445/75R22.5 | 455/45R22.5

Reference No.	Thickness (mm)	Wheel Weight (kg)	P.C.D (mm)	Bolt Holes	Centre Hole (mm)	Bolt Type	Inset (mm)	Outset (mm)	Capacity (kg)
GT050-01	29	32.9	335	10-ø26	281.2	1x45°	22	51	6210
GT050-02	29	32.9	335	10-ø32	281.2	1x45°	22	51	6210
GT050-03	29	34.7	285.75	10-ø26	220	1x45°	22	51	6210
GT050-05	29	34.7	285.75	10-ø26	221	1x45°	22	51	6210
GT050-07	29	33.2	335	10-ø26	281.2	1x45°	22	51	5810
GT050-08	29	33.1	335	10-ø26	281.2	1x45°	22	51	5810
GT050-11	29	34.7	285.75	10-ø26	221	1x45°	22	51	6210
GT050-12	26.5	28	335	10-ø26	281.2	1x45°	24.5	51	5800
GT050-13	25	26	335	10-ø26	281.2	1x45°	26	51	5800
GT050-16	29	29.8	285.75	10-ø26	220	1x45°	24.5	51	5800
GT050-17	25	27.6	285.75	10-ø26	220	1x45°	26	51	5800
GT050-18	29	34.7	285.75	10-ø26	220	1x45°	22	51	6210



WHO WE ARE

TIA GROUP



With 25 years of industry expertise, the TIA Group proudly supports both the after-market and OEM sectors through our three specialised divisions: tyres, wheels and agricultural.

Our divisions serve a wide spectrum of the industry, from commercial to industrial, collaborating with some of the most respected names in transport.



WHOLESALE SERVICES

We supply tyres directly from our warehouse, letting you order any quantity with fast delivery, competitive pricing, and the support of our expert customer service team. Our **Super Wholesale** service delivers container shipments of budget tyres directly from the factory to your door, with access to discounted warehouse backup stock for added convenience.

OUR DIVISIONS

TIA GROUP



TBR & PCR TYRE SPECIALISTS

Since 1999, TIA Tyres has been a leading force in tyre wholesale, delivering a broad range of passenger car, high-performance, 4x4, van, truck and bus tyres.

Our TBR division works closely with brands across every tier of the market from premium names such as Bridgestone and Continental, to mid-range leaders like Yokohama and CEAT, all the way through to dependable budget options including Torque.



Our PCR team specialises in the wholesale distribution of car and van tyres, supporting customers from national depots to local garages across the country, focusing on a variety of budget to mid-range brands. Orders ship twice daily, ensuring the quickest possible delivery, straight to your door.



CONSTRUCTION & AGRI SPECIALISTS

Launched in 2022, TIA Agri is the newest addition to the TIA Group and has quickly established itself as an industry leader of agricultural and construction tyres.

Our portfolio brings together a diverse mix of leading brands, each offering proven solutions across both agricultural and construction applications.



Backed by a seasoned team with deep knowledge of the sector, we go beyond simply supplying tyres. We pride ourselves on our hands-on approach, including farm visits and on-site tyre optimisation, ensuring every solution we provide is practical and reliable.



Your partner in wheels,
from production to distribution

Halesfield 13, Telford, TF7 4PL

sales@tiawheels.co.uk

+44 01952 327676